

Fiberglass FRE® Elbows



Following the Acquisition of FRE Composites®, We Are Proud to Offer Fiberglass Elbows Through Allied Tube & Conduit®

No Burn-Through/Low Coefficient of Friction

Epoxy fiberglass elbows are low friction and eliminate burn-through on the bend. With our unique glass to resin ratio, our fiberglass has the lowest coefficient of friction of any material currently available on the market. This means that electrical cables are easier to pull through, resulting in labor saving, quicker installation and a reduced number of costly manholes.


Lightweight

Lighter than industry comparable solutions/materials.

Corrosion Resistant

Our 100% non-metallic epoxy fiberglass is not impacted by the effects of water, salt water or most other chemicals.


How To Select An Elbow Part

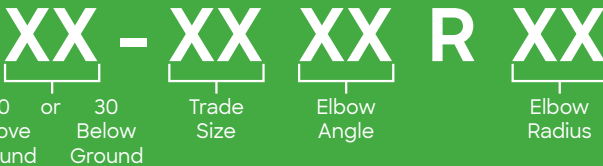

Iron Pipe Size (IPS)	Use	Trade Size (in)	Use	Elbow Angles	Use	Elbow Radius (in)	Use		
Above Ground	10	¾	75	11¼	35	*12	12		
		1	10	22½	34	**24	24		
		1¼	12						
		1½	15	30	33	36	36		
		2	20						
		Below Ground	30	2½	25	45	32	48	48
				3	30	60	31	60	60
				4	40	90	30	72	72
5	50								
6	60	90	30	***72	72				
8	80								

Example
4" IPS (Iron Pipe Size)
Below Ground 90° X 36"
Radius With 2 PVC Deep Swedge Couplings

30 - 40 30 R 36 - PVC



End Type	Use
Deep socket PVC coupling on each end	PVC
1 PVC end, 1 factory plain end	1PVC
1 PVC end and female threaded adapter on the other end	1PVC1FTHR

*Not applicable for trade sizes 3" and above
**Not applicable for trade sizes 5" and above
*** 72" is the tightest radius available

