



VERGOKAN NEMA 1 CABLE LADDER

A NEW GENERATION OF LIGHT WEIGHT MEDIUM DUTY NEMA 1 CABLE LADDERS

Crafted with meticulous attention to detail, the Vergokan NEMA1 cable ladder embodies the perfect synergy between form and function. Its sleek and minimalist design seamlessly blends into any environment. It's light weight yet robust construction and clever design of its accessories ensures the cable ladder is easy to install.



Data Centres



Carparks



Renewables



Distribution Centres



Industrial



Commercial



A new era of medium duty cable ladder systems, where functionality meets innovation in perfect harmony. Available in two side rail heights; 60mm or 85mm offering a unique S profile side rail for extra stability and firmness whilst maintaining cable ladder strength.

▶ **Light weight steel**

Easier to handle and install when compared to traditional steel ladders

▶ **TrueGalv finish on the ladder and shapes**

Making the ladder system resistant to corrosive elements

▶ **Superior load rating capacity for a medium duty ladder**

75kg/m (VL60) and 140kg/m (VL85) at 3m spans

▶ **Four cable laying widths available**

150/300/450/600mm

▶ **Perforated side rail**


For ease of on-site cutting and installation

▶ **A wide range of shapes and accessories**

Crosses, bends, tees and covers making this range of ladders suitable to a wide range of applications




▶ **Tested to NEMA VE1**

For installations requiring certification according to the National Electrical Code

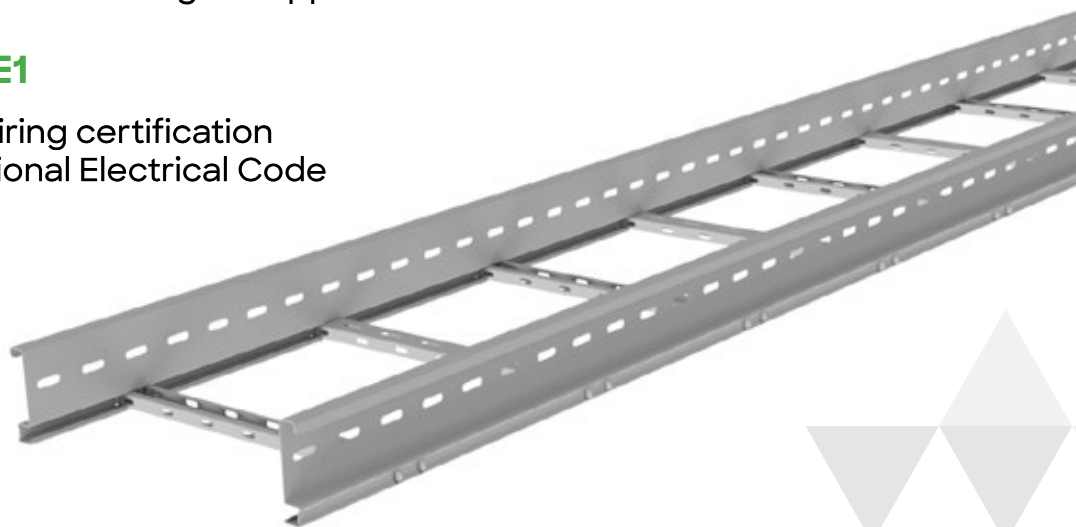

TrueGalv[®]

Ordering Guide

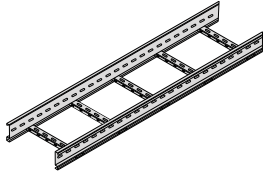

LADDER

BEND

SPLICE PLATE KIT

MATERIAL NO.	CATALOG NO.	CABLE LAYING WIDTH (mm)	OVERALL WIDTH (mm)	MATERIAL NO.	CATALOG NO.	MATERIAL NO.	CATALOG NO.
VL60 Ladder (NEMA 12AA)							
4042163	VL60.150	150	184	4042175	VL60B90.150K		
4042164	VL60.300	300	334	4042176	VL60B90.300K	Interlocking side rails, order 1 x 4042379 VB0610, containing 8 x M6 bolts & nuts	
4042165	VL60.450	450	484	4042177	VL60B90.450K		
4042166	VL60.600	600	634	4042178	VL60B90.600K		
VL85 Ladder (NEMA 12A)							
4042167	VL85.150	150	184	4042179	VL85B90.150K		
4042168	VL85.300	300	334	4042180	VL85B90.300K	4042350	VLSP.85K
4042169	VL85.450	450	484	4042181	VL85B90.450K		
4042170	VL85.600	600	634	4042182	VL85B90.600K		

Ladder is sold in 6m lengths.

Also available is a wide range of internal and external riser shapes, tees, reducer splice plate and non-vented covers.

Load Rating




SPAN (m)



LOAD PER METRE

VL60 Ladder (NEMA 12AA)	
3	75
4	43
5	26
6	20
VL85 Ladder (NEMA 12A)	
3	140
4	80
5	50
6	35

Meets the loading requirements of NEMA 12AA (VL60) and NEMA 12A (VL85) classification.

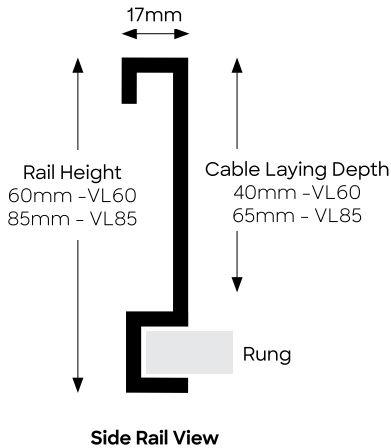

For more information, visit our website or contact customer service on

1300 ATKORE (285 673) | atkore.com.au

Atkore™
Unistrut • Flexicon